

PODIUM DS75... Display Solutions for Outdoor Installation Environments




| | |
|------------------------------|---|
| Active Display Area | 75" Digital 44"W x 65"H [EU 1145mmW x 1710mmH] static |
| Resolution | 3840x2160 |
| Orientation | Portrait back-to-back |
| Aspect Ratio | 16:9 |
| Brightness | 2500 nits digital and 350 nits static |
| Contrast | 1200:1 |
| Viewing Angle | 178° |
| Display Colors | 8 bit + FRC color depth display 1.07G colors |
| Connectivity | Ethernet/Wi-Fi/LTE |
| Environmental Rating | Outdoor |
| Mounting | Floor-standing |
| Mechanical Dimensions | NA = 90.08"H x 52.8"W x 12.2"D EU = 2328mmH x 1340mmW x 310mmD |
| Weight | 770 lbs |
| Power (max) | 1000 to 1800W |
| Power Supply | 120VAC 60HZ & 240VAC 50HZ |
| Player | BrightSign HS125 |
| IP Rating | IP56 |
| Glass (IK Rating) | 4+4mm laminated AR with black serigraphic frit (IK08) |
| Operating Temperature | -4°F to 122°F |
| Certifications | UL62368, UL50e, FCC, CE, C-Tick |

BrightSign HS145

Superior System-On-a-Chip (SoC) solution power by

BrightSignOS™

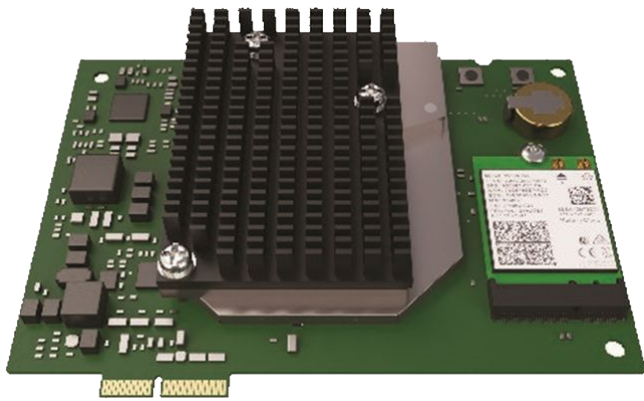

| | |
|--|---|
| Video Engine | 4K 8-bit at 60p 4K 10-bit at 30p Full HD at 60p |
| HTML5 Engine | HTML5, CSS, Javascript, SVG, WebGL and Chromium Compatibility |
| Video Media Formats | 4K Video Codecs: H.265, H.264 4K Video Containers: .ts, .mov, .mp4, .mkv Full HD Video Codecs: H.265, H-264 (MPEG-4, Part 10), MPEG-2 Full HD Video Containers: .ts, .mpg, .vob, .mov, .mp4, .m2ts |
| Image Formats | .BMP, .JPEG, .PNG |
| Audio Formats (only applicable with availability of speakers) | .MP2, .MP3, .ACC, .WAV (AC3 is passed through) |
| Storage | 256GB PCIe SSD and MicroSD Class 10 |
| Connectivity | Ethernet/Wi-Fi/LTE |