

Placard VS... Display Solutions for semi-outdoor installation environments




www.praevar.com

Active Display Area	55"	65"	75"
Resolution	3840x2160		
Orientation	Landscape/Portrait		
Aspect Ratio	16:9		
Brightness	1500 nits		
Contrast	1200:1		
Viewing Angle	178°		
Display Colors	8 bit + FRC color depth display 1.07G colors		
Connectivity	Ethernet/Cellular/Wi-Fi		
Environmental Rating	Semi-Outdoor [no direct sunlight]		
Mounting	Wall swing-frame, with floor-stand option		
Mechanical Dimensions H x W x D	50.6" x 29.6" x 3.9"	58.9" x 34.3" x 3.9"	67.6" x 39.1" x 3.9"
Weight	132 lbs	187 lbs	242 lbs
Power (max)	300W	400W	600W
Player	BrightSign HS125		
Power Supply	120 ~ 240 VAC		
IP Rating	56		
Glass (IK Rating)	3+3mm laminated AR with black serigraphic frit [IK08]		
Operating Temperature	-4°F to 122°F		
Certifications	UL62368, UL50e, CE, FCC		

BrightSign HS145

Superior System-On-a-Chip (SoC) solution power by

BrightSignOS™

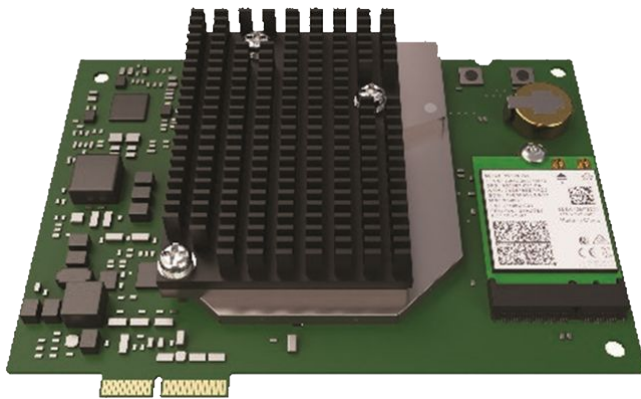

Video Engine	4K 8-bit at 60p 4K 10-bit at 30p Full HD at 60p
HTML5 Engine	HTML5, CSS, Javascript, SVG, WebGL and Chromium Compatibility
Video Media Formats	4K Video Codecs: H.265, H.264 4K Video Containers: .ts, .mov, .mp4, .mkv Full HD Video Codecs: H.265, H-264 (MPEG-4, Part 10), MPEG-2 Full HD Video Containers: .ts, .mpg, .vob, .mov, .mp4, .m2ts
Image Formats	.BMP, .JPEG, .PNG
Audio Formats (only applicable with availability of speakers)	.MP2, .MP3, .ACC, .WAV (AC3 is passed through)
Storage	256GB PCIe SSD and MicroSD Class 10
Connectivity	Ethernet/Wi-Fi/LTE